



## INSTALLING YOUR LICENSE PLATE TRANSPONDER (LPT)

### Mounting Instructions for Passenger Vehicles

The License Plate Transponder (LPT) is recommended for passenger vehicles when the interior transponder cannot be used. The transponder must be mounted to the top of the front license plate using the existing license plate mounting screws.

#### Requirements:


- For reliable operation of the transponder, the vehicle must be equipped with only one correctly mounted transponder while passing through a toll facility. Other transponders present in or on the vehicle must be switched off or enclosed in the foil bag provided when the transponder was purchased.
- The mounting location must provide direct line-of-sight communication between the transponder and the toll facility's overhead antenna.
- If your license plate area is partially obstructed by an overhanging bumper, please use an internal windshield mounted transponder.
- Always mount the transponder to the **TOP** of the **Front** License Plate.

#### LPT Location: Front License Plate

1. Remove the two upper license plate mounting screws securing the license plate to the front of the vehicle.
2. Using the license plate mounting screws removed in step 1, secure the transponder, with **arrows pointing skyward** on the front license plate of the vehicle. *See diagram below.*
3. Improper orientation of the transponder may cause unreliable operation of the transponder in the tolling lanes. *See diagram below.*



Orientation Arrow (Pointing Skyward)

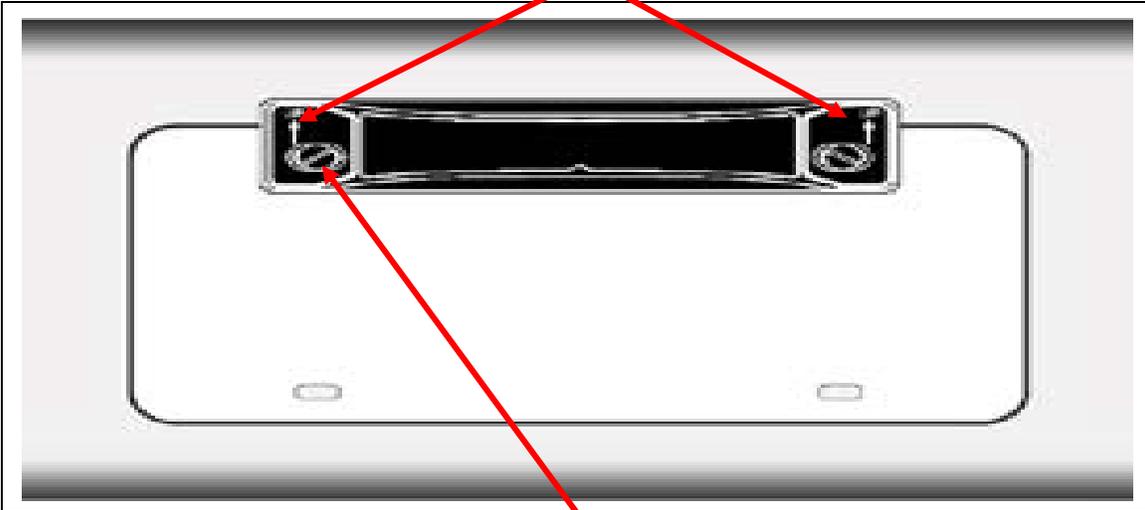

License Plate Mounting Screw



Orientation Arrow (Pointing Skyward)